

75ns, Low-Power, Open Drain Comparators

FEATURES

- Low Power Consumption: 180 μ A (TYP)
- Wide Supply Voltage: 2.7V to 5.5V
- Fast Response: 75ns Propagation Delay with 100mV Overdrive
- Input Common-Mode Range Extends 300mV
- 6mV Internal Hysteresis
- Open Drain Output
- Offset Voltage: ± 3.5 mV Maximum
- Operating Temperature Range: -40°C to +125°C
- Packages: SOT-23-5L, SOP8, MSOP8, SOP14, TSSOP14


PRODUCT DESCRIPTION

The TS2637D family of products is a low-voltage, micro-power CMOS comparator which spends less than 180 μ A per-channel of quiescent current. These devices support rail-to-rail input and the input common-mode range extends beyond the supply rails.

These devices are calibrated to specified at the full temperature range of -40°C to +125°C and operate with a single or dual power supply ranged from 2.7V to 5.5V.

APPLICATIONS

- RC Timers
- Portable and Battery-Powered Devices
- IR Receivers
- Threshold Detectors and Discriminators
- Rotary Position Encoders
- Zero-Crossing Detectors

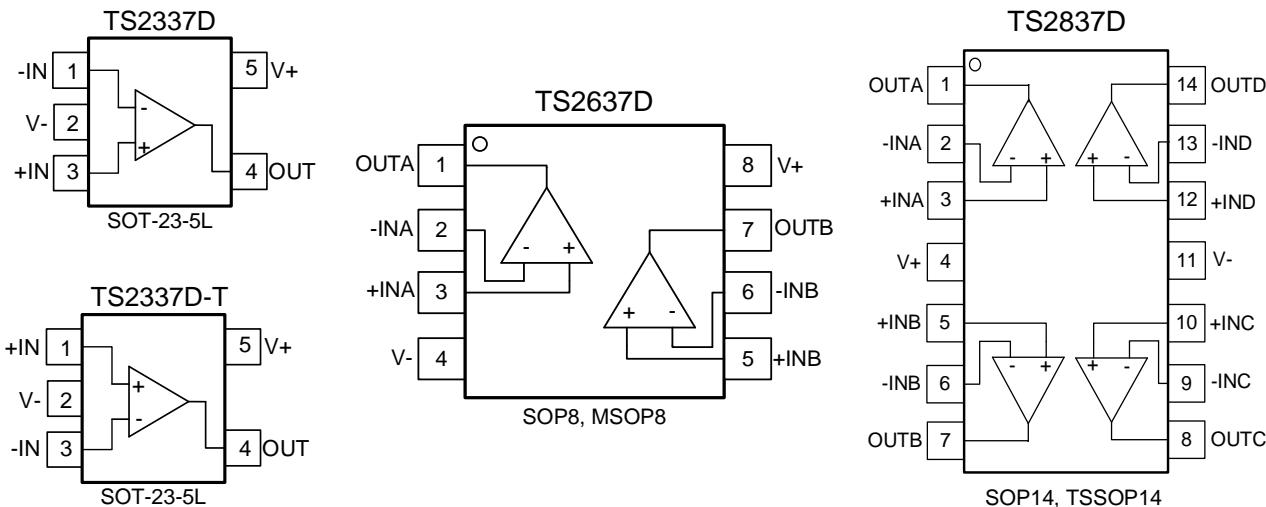

ORDERING INFORMATION

Model	Part Number	Eco Plan	Package	CMP	Container, Pack Qty
TS2337D	TS2337DSOT235L	RoHS	SOT-23-5L	1	Reel, 3000
TS2337D-T	TS2337DTSOT235L	RoHS	SOT-23-5L	1	Reel, 3000
TS2637D	TS2637DSOP8	RoHS	SOP8	2	Reel, 2500
TS2637D	TS2637DMSOP8	RoHS	MSOP8	2	Reel, 3000
TS2837D	TS2837DSOP14	RoHS	SOP14	4	Reel, 2500
TS2837D	TS2837DTSSOP14	RoHS	TSSOP14	4	Reel, 3000

ABSOLUTE MAXIMUM RATINGS

Over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

Parameter	Min	Max	Unit
Supply Voltage		7	V
Signal Input Terminal voltage	(V-) - 0.5	(V+) + 0.5	V
Operating Temperature	-40	150	°C
Junction Temperature		150	°C
Storage Temperature Range	-65	150	°C
Lead Temperature (Soldering, 10s)		260	°C
ESD HBM		±2000	V
ESD MM		±200	V
ESC CDM		±1000	V

- (1) Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subject to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

ELECTRICAL CHARACTERISTICS: $V_S = +2.7V$ to $+5.5V$







Boldface limits apply over the specified temperature range, $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$.

At $T_A = +25^\circ\text{C}$, $V_{CM} = V_S / 2$, $R_{PU} = 4.99\text{k}\Omega$, $C_{Load} = 36\text{pF}$ (unless otherwise noted)

Parameter	Operating Conditions		Min	Typ	Max	Unit	
V_S	Power Supply Voltage		2.7		5.5	V	
I_S	Supply Current (per comparator)		$V_S = 5V$, $I_{OUT} = 0$, $V_{ID} = -0.1V$ (Output Low)	180	250	μA	
PSRR	Power Supply Rejection Ratio		$V_S = 2.7V$ to $5.5V$, $V_{CM} = 0$ $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$	90	200 450	$\mu\text{V/V}$ $\mu\text{V/V}$	
Input Characteristics							
V_{OS}	Input Offset Voltage		$V_S = 5V$, $V_{CM} = V_S / 2$		0.7	mV	
$\Delta V_{OS}/\Delta T_A$	Average Drift		$T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$		2	$\mu\text{V/}^\circ\text{C}$	
V_{HYST}	Input Hysteresis Voltage		$V_S = 5V$, $V_{CM} = V_S / 2$		6	mV	
$\Delta V_{HYST}/\Delta T_A$	Average Drift		$T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$		10	$\mu\text{V/}^\circ\text{C}$	
I_B	Input Bias Current				10	pA	
I_{OS}	Input Offset Current				10	pA	
CMRR	Common Mode Rejection Ratio		$V_S = 5.5V$, $-0.3V < V_{CM} < 5.8V$ $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$	59 58	70	dB dB	
V_{CM}	Input Voltage Range			(V-) - 0.3	(V+) + 0.3	V	
Output Characteristics							
V_{OL}	Output Voltage Low		$V_S = 5V$, $V_{CM} = 0V$	$I_{OUT} = -2\text{mA}$ $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$	50 100	mV mV	
I_{SC}	Short-Circuit Current		$V_S = 5V$, Sinking	36	41	mA	
			$T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$	30		mA	
I_{LKG}	Open-Drain Output Leakage Current		$V_S = 5V$, $V_{CM} = 0V$, $V_{PU} = 10V$, $V_{ID} = +0.1V$ (output high)		350	pA	
Dynamic Performance							
t_F	Fall Time		$V_S = 5V$, Overdrive = 100mV	80% to 20%	4	ns	
t_{PHL}	Propagation Delay (High to Low)	Overdrive = 100mV	$V_S = 5V$ $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$		75 150	ns	
			$V_S = 2.7V$ $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$		86 170	ns	
Temperature Range							
θ_{JA}	Specified Range			-40	+85	°C	
	Operating Range			-50	+125	°C	
	Storage Range			-65	+150	°C	
	Thermal Resistance			200		°C/W	
	SOT-23-5L			150		°C/W	
	MSOP8, SOP8			100		°C/W	
	SOP14, TSSOP14					°C/W	

TYPICAL CHARACTERISTICS


At $T_A = +25^\circ\text{C}$, $V_s = 5\text{V}$, $R_{PU} = 4.99\text{k}\Omega$, $C_{Load} = 36\text{pF}$, and $V_{CM} = V_s / 2$ (unless otherwise noted)

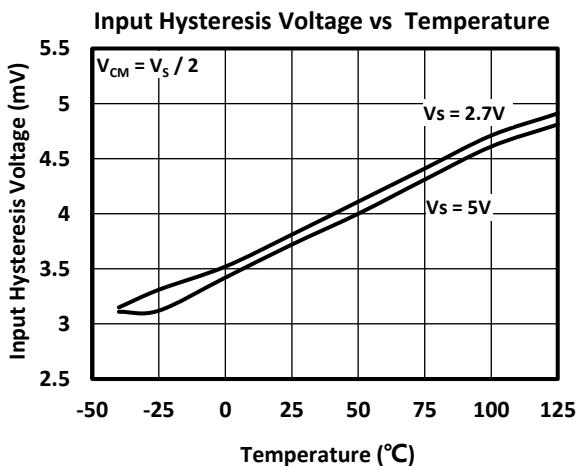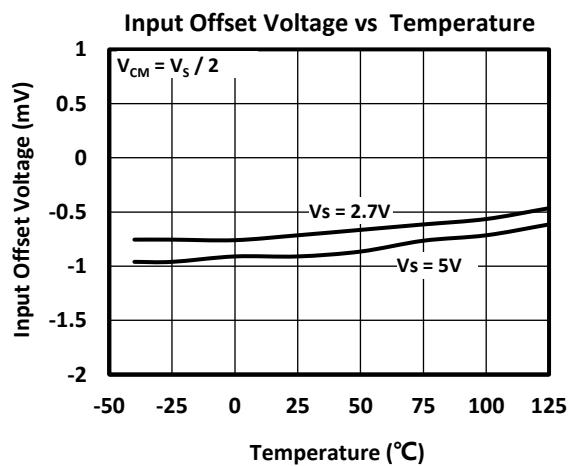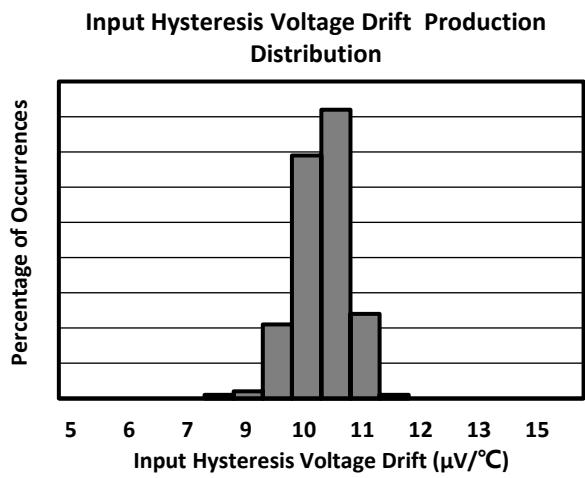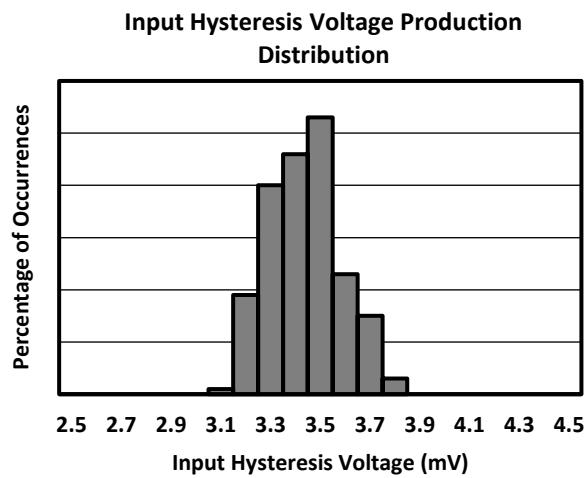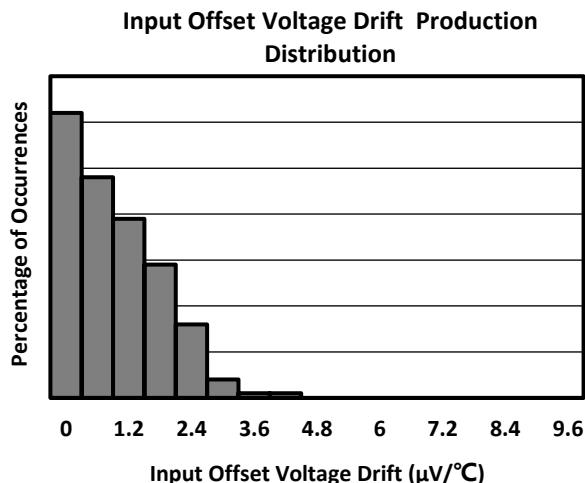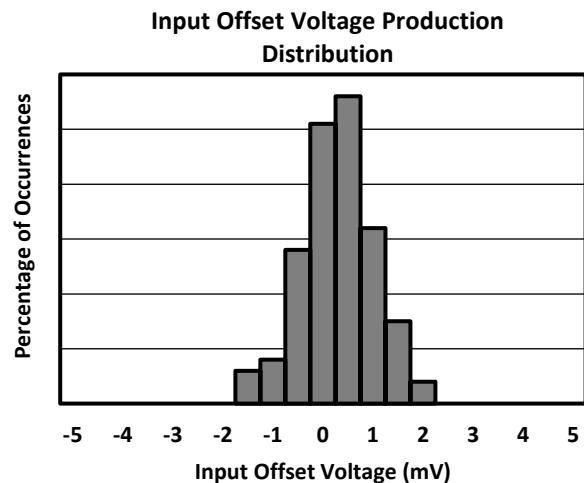


TYPICAL CHARACTERISTICS (CONTINUE)

At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_{PU} = 4.99\text{k}\Omega$, $C_{Load} = 36\text{pF}$, and $V_{CM} = V_S / 2$ (unless otherwise noted)


Input Offset Voltage vs Common Mode

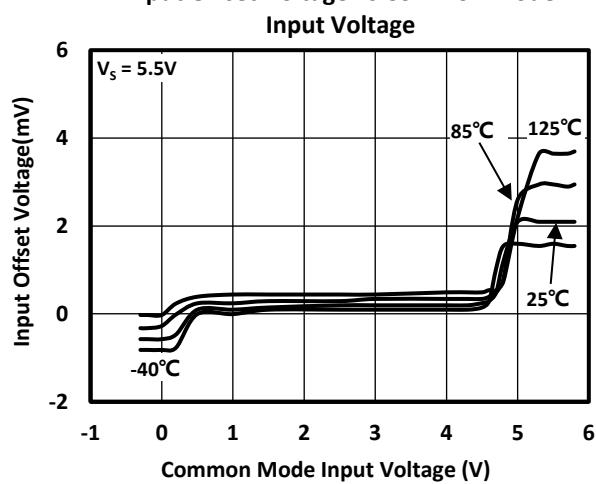


Input Offset Voltage vs Common Mode

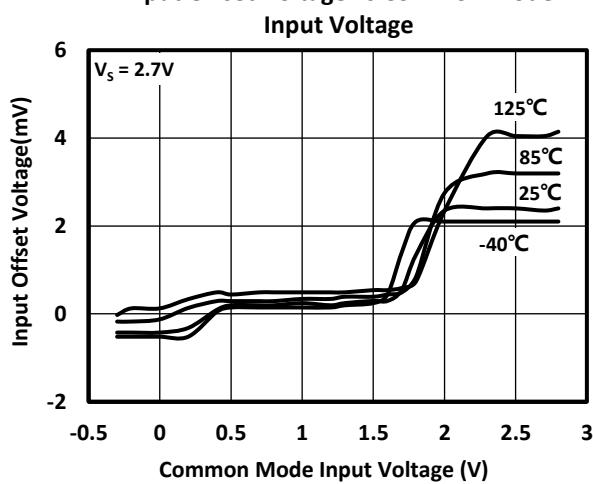


Input Hysteresis Voltage vs Common Mode

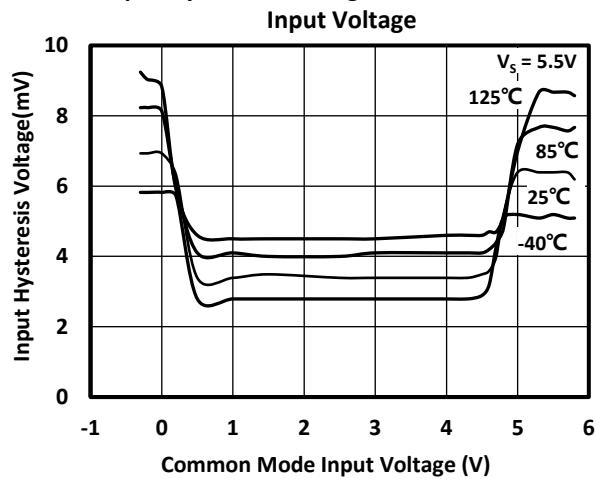


Input Hysteresis Voltage vs Common Mode

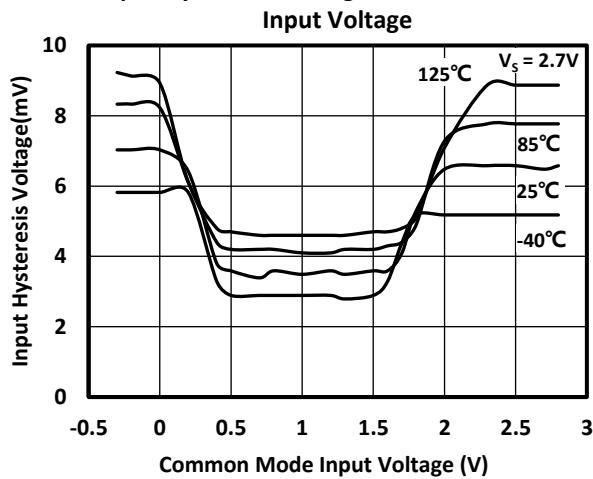

Input Offset Voltage vs Supply Voltage






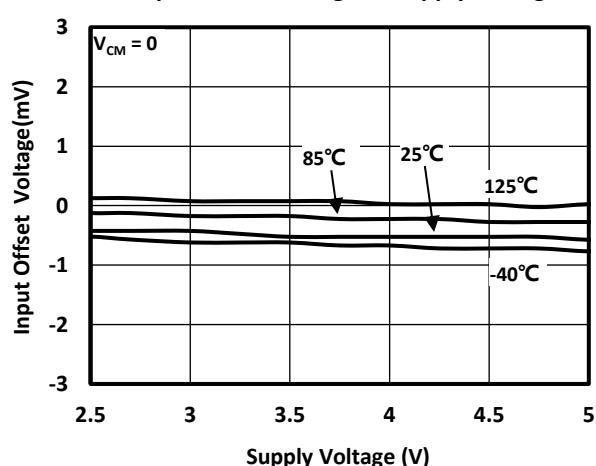


Input Hysteresis Voltage vs Supply Voltage

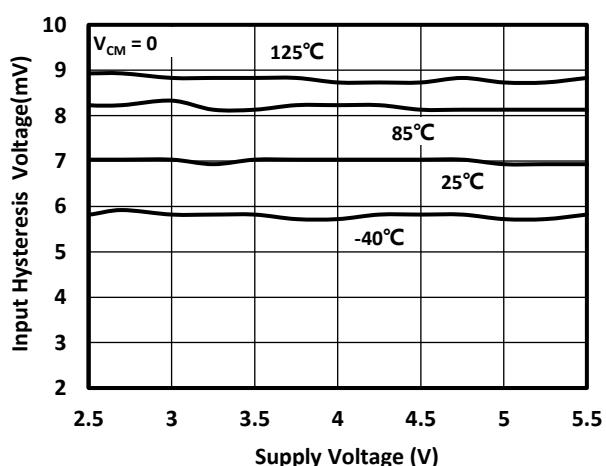

TYPICAL CHARACTERISTICS (CONTINUE)


At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_{PU} = 4.99\text{k}\Omega$, $C_{Load} = 36\text{pF}$, and $V_{CM} = V_S / 2$ (unless otherwise noted)

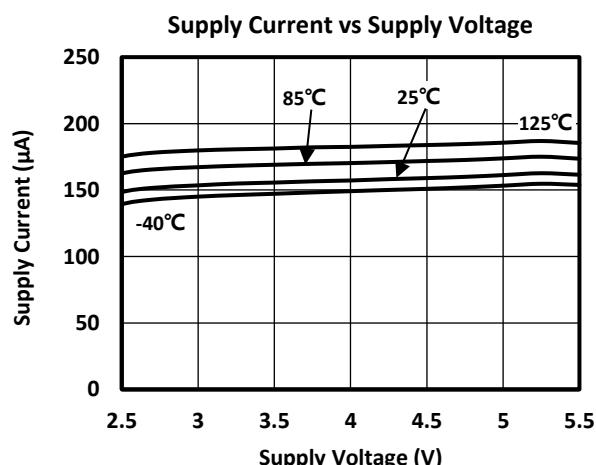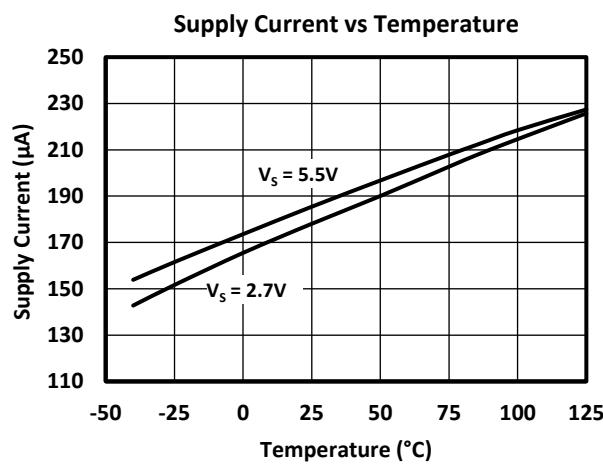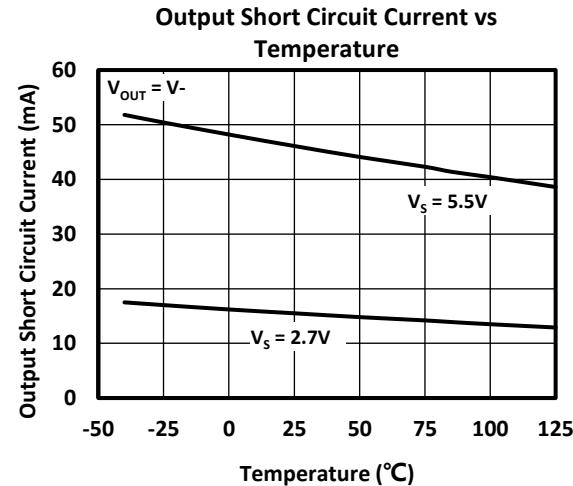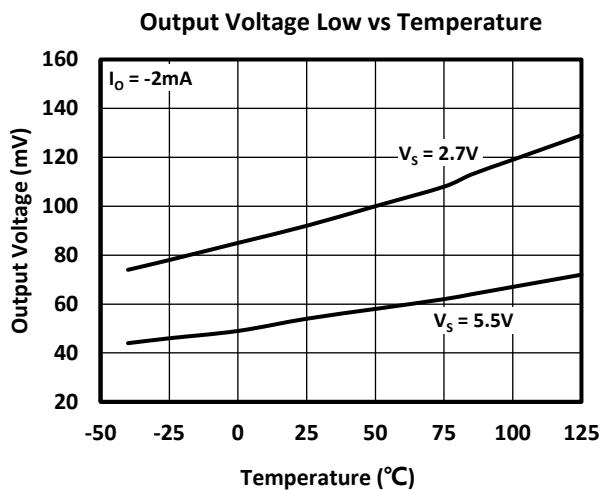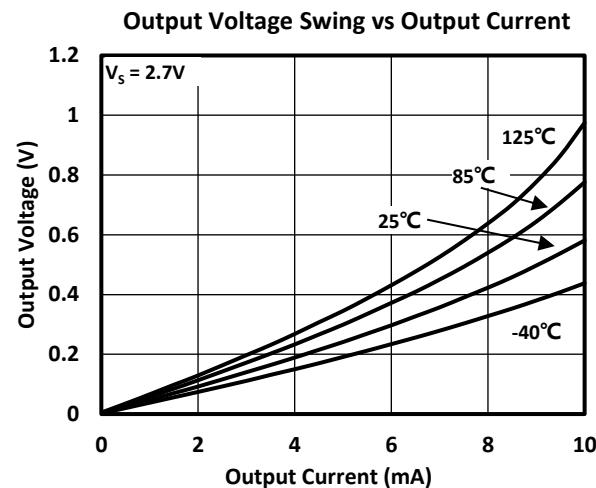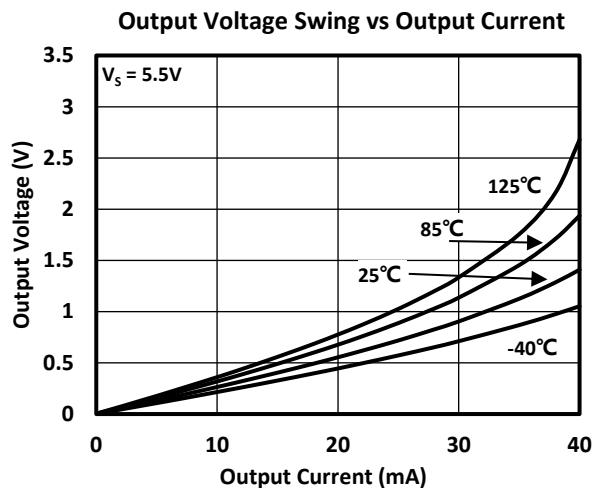


TYPICAL CHARACTERISTICS (CONTINUE)

At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_{PU} = 4.99\text{k}\Omega$, $C_{Load} = 36\text{pF}$, and $V_{CM} = V_S / 2$ (unless otherwise noted)


Propagation Delay Production Distribution

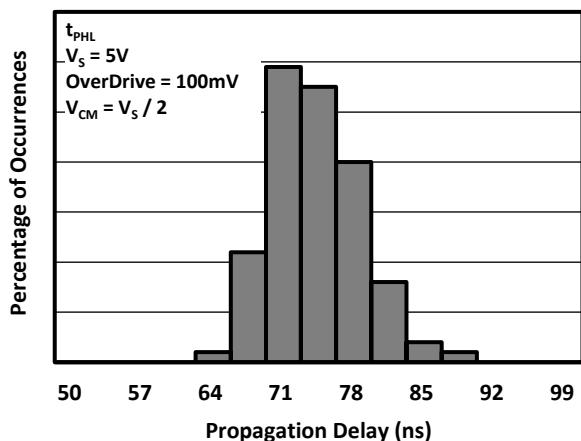


Propagation Delay vs Temperature

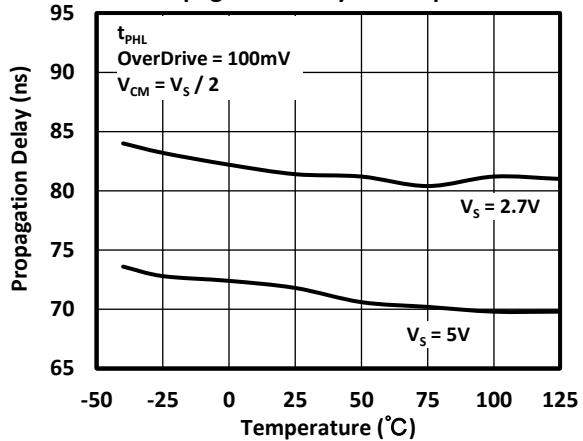

Propagation Delay vs Supply Voltage

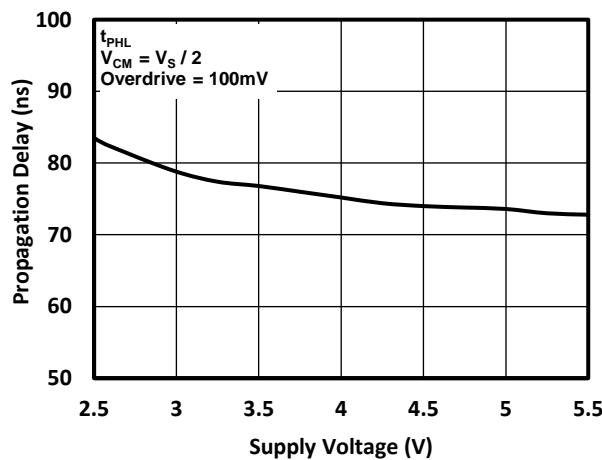


Propagation Delay vs Overdrive

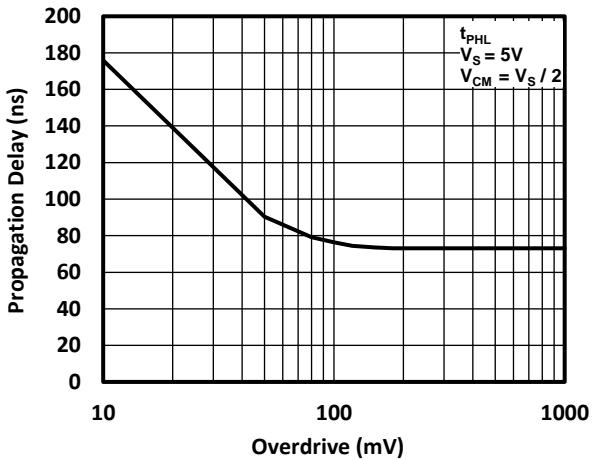

MECHANICAL DIMENSIONS


SOT-23-5L PACKAGE MECHANICAL DRAWING

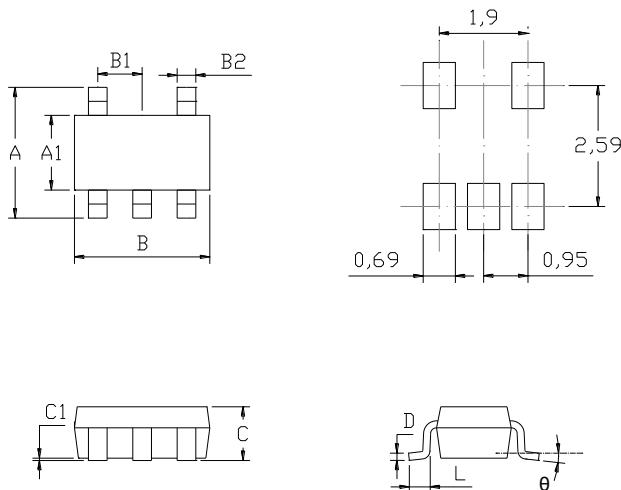

SOT-23-5L PACKAGE MECHANICAL DATA

symbol	dimensions			
	millimeters		inches	
	min	max	min	max
A	2.650	2.950	0.104	0.116
A1	1.500	1.700	0.059	0.067
B	2.820	3.020	0.111	0.119
B1	0.950		0.037	
B2	0.300	0.500	0.012	0.020
C	1.250		0.049	
C1	0	0.100	0	0.004
L	0.300	0.600	0.012	0.024
D	0.100	0.200	0.004	0.008
θ	0°	8°	0°	8°


SOP8 PACKAGE MECHANICAL DRAWING

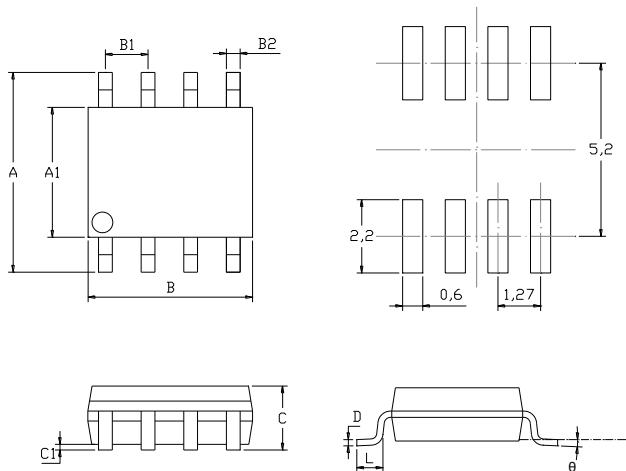

SOP8 PACKAGE MECHANICAL DATA

symbol	dimensions			
	millimeters		inches	
	min	max	min	max
A	5.800	6.200	0.228	0.244
A1	3.800	4.000	0.150	0.157
B	4.700	5.100	0.185	0.201
B1	1.270		0.050	
B2	0.330	0.510	0.013	0.020
C		1.750		0.069
C1	0.100	0.250	0.004	0.010
L	0.400	1.270	0.016	0.050
D	0.170	0.250	0.007	0.010
θ	0°	8°	0°	8°


MSOP8 PACKAGE MECHANICAL DRAWING

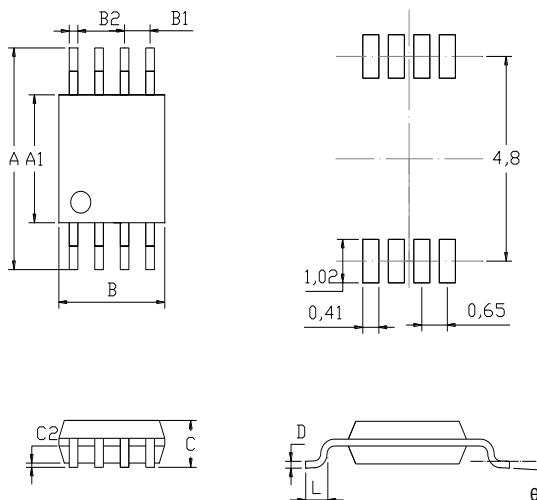

MSOP8 PACKAGE MECHANICAL SPECIFICATIONS

symbol	dimensions			
	millimeters		inches	
	min	max	min	max
A	4.750	5.050	0.187	0.199
A1	2.900	3.100	0.114	0.122
B	2.900	3.100	0.114	0.122
B1	0.650		0.026	
B2	0.250	0.380	0.010	0.015
C	0.820	1.100	0.032	0.043
C2	0.020	0.150	0.001	0.006
L	0.400	0.800	0.016	0.031
D	0.090	0.230	0.004	0.009
θ	0°	6°	0°	6°


SOP14 PACKAGE MECHANICAL DRAWING

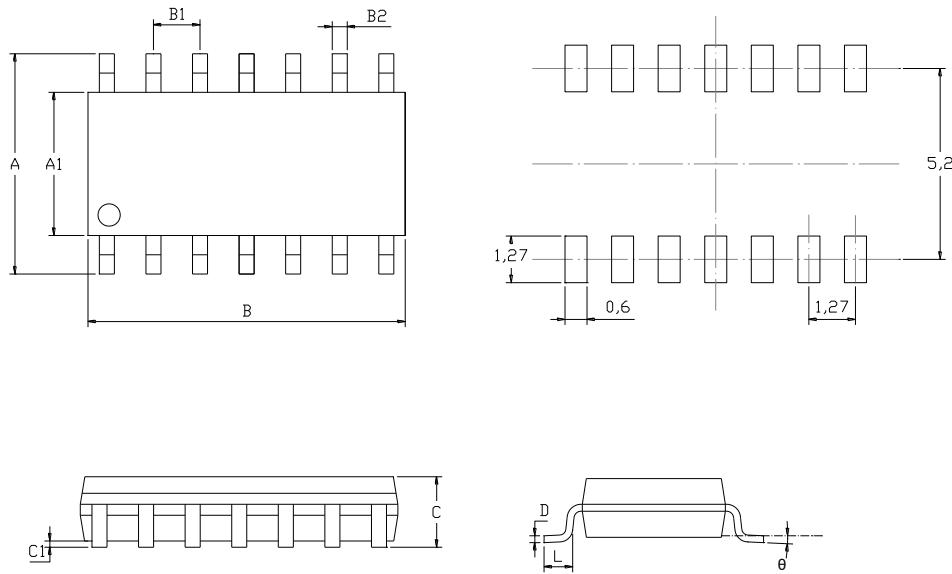

SOP14 PACKAGE MECHANICAL DATA

symbol	dimensions			
	millimeters		inches	
	min	max	min	max
A	5.800	6.200	0.228	0.244
A1	3.800	4.000	0.150	0.157
B	8.450	8.850	0.333	0.348
B1	1.270		0.050	
B2	0.310	0.510	0.012	0.020
C		1.750		0.069
C1	0.100	0.250	0.004	0.010
L	0.400	1.270	0.016	0.050
D	0.100	0.250	0.004	0.010
θ	0°	8°	0°	8°


TSSOP14 PACKAGE MECHANICAL DRAWING

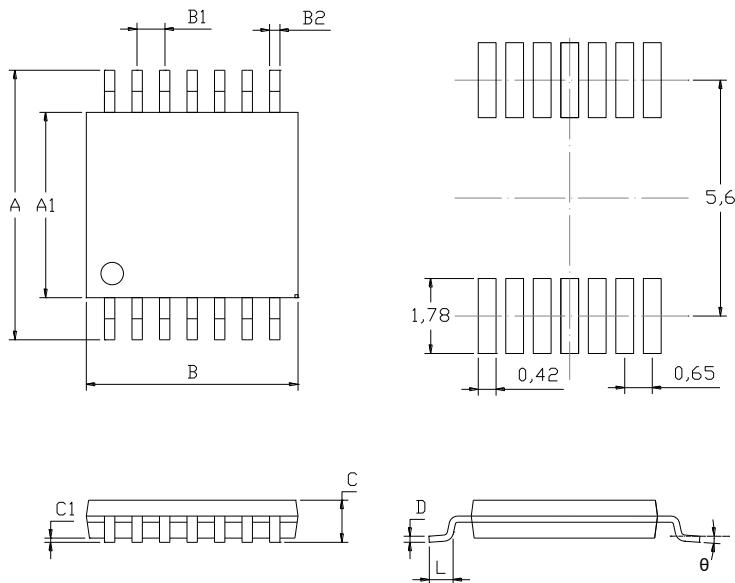

TSSOP14 PACKAGE MECHANICAL DATA

symbol	dimensions			
	millimeters		inches	
	min	max	min	max
A	6.250	6.550	0.246	0.258
A1	4.300	4.500	0.169	0.177
B	4.900	5.100	0.193	0.201
B1	0.650		0.026	
B2	0.190	0.300	0.007	0.012
C	1.200		0.047	
C1	0.050	0.150	0.002	0.006
L	0.500	0.700	0.020	0.028
D	0.090	0.200	0.004	0.008
θ	1°	7°	1°	7°

TAPE AND REEL INFORMATION

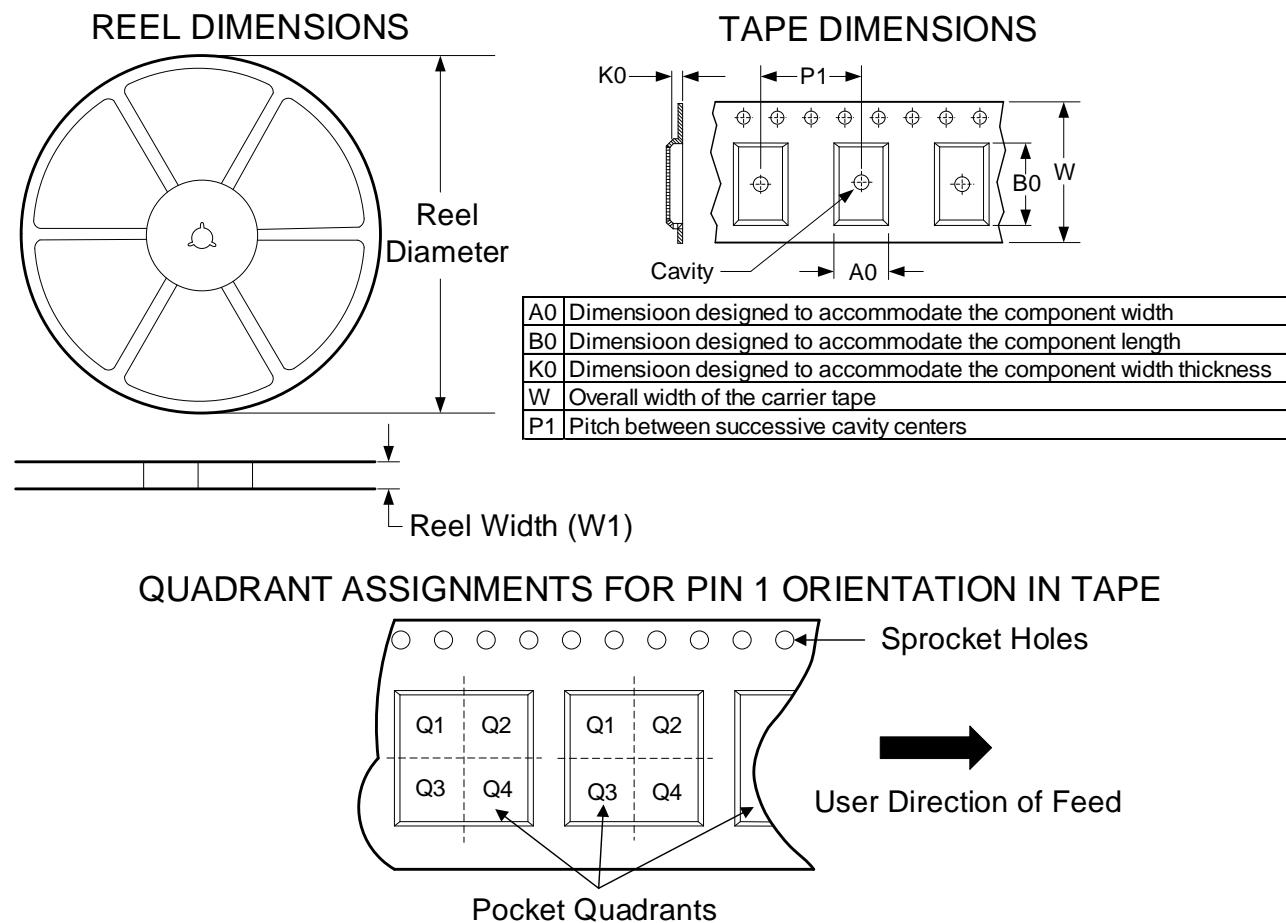

Device	Package Type	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TS2337DSOT235LR	SOT-23-5L	5	3000	180.0	9.0	3.2	3.3	1.4	4.0	8.0	Q3
TS2337DTSOT235LR	SOT-23-5L	5	3000	180.0	9.0	3.2	3.3	1.4	4.0	8.0	Q3
TS2637DSOP8R	SOP8	8	2500	330.0	12.4	6.4	5.4	2.1	8.0	12.0	Q1
TS2637DMSOP8R	MSOP8	8	3000	330.0	12.4	5.2	3.3	1.5	8.0	12.0	Q1
TS2837DSOP14R	SOP14	14	2500	330.0	12.4	6.5	9.0	2.1	8.0	16.0	Q1
TS2837DTSSOP14R	TSSOP14	14	3000	330.0	12.4	6.8	5.4	1.2	8.0	12.0	Q1

REVISION HISTORY

NOTE: Page numbers for previous revisions may be different from that of the current version.

2020/8/20 — REV KY1.0.0A to REV KY1.0.1A

Added notice to ABSOLUTE MAXIMUM RATINGS 2

2020/11/26 — REV KY1.0.1A to REV KY1.0.2A

Updated chip pin definition 1

2021/07/13 — REV KY1.0.2A to REV KY1.1.2A

Updated TSSOP14 SPQ..... 2,13

2022/06/02 — REV KY1.1.2A to REV KY1.2.2A

Updated **ELECTRICAL CHARACTERISTICS**..... 3

2022/09/20 — REV KY1.2.2A to REV KY1.3.2A

Added TS2337D-T and Updated **ELECTRICAL CHARACTERISTICS**..... 3

CONTACT INFORMATION

Trusignal Microelectronics

Phone: +86 512-65923982

Fax: +86 512-65923995

Email: support@kunyuanic.com; sales@kunyuanic.com